



Leader Inline Conventional Baler



Baler Specifications and Standard Features

- Bale chamber: 46cmx36cm
 - Extended bale chamber to 1.5 m for high density
 - Auto lube knotter system - Auto chain oilers
 - 2.4 m wide low profile pick up ,5 Centre supported pick up bars
 - Double plunger bearings 4- each side - Rear camera with in cab monitor
 - Rear LED road lighting - Knotter fan blower German-made Rasspe knotters Twin rear toolboxes
- 10 ball twine capacity- baler is delivered with full twine boxes
- Flotation tires
 - Electronic bale counter

Technical parameters of LEADER 9YF-2200


SN	Parameter Description	unit	specifications
1	Name	/	9YF-2200 Square Grass Baling Machine
2	Hooking type	/	Traction
3	width(net) of Pickup unit	mm	2200
4	Width of feeding	mm	430
5	Structure of pickup unit	/	Spring-tooth
6	Structure of feeding	/	Middle feeding
7	Knotter type	/	D
8	Quantity of knotter	pcs	2
9	Cross Section of Bales (width x height)	mm	460x360
10	Bundling type	/	Nylon rope
11	Traction power range	Kw	Above 36.76
12	Overall size of Baler (length x width x height)	mm	4665x2950x1750
13	Price/unit	USD	Exworks


In-person factory visit in Fudong Industrial Zone, Shandong Province May 2024.










Full analysis of the production process within the factory in Weifang City, China.

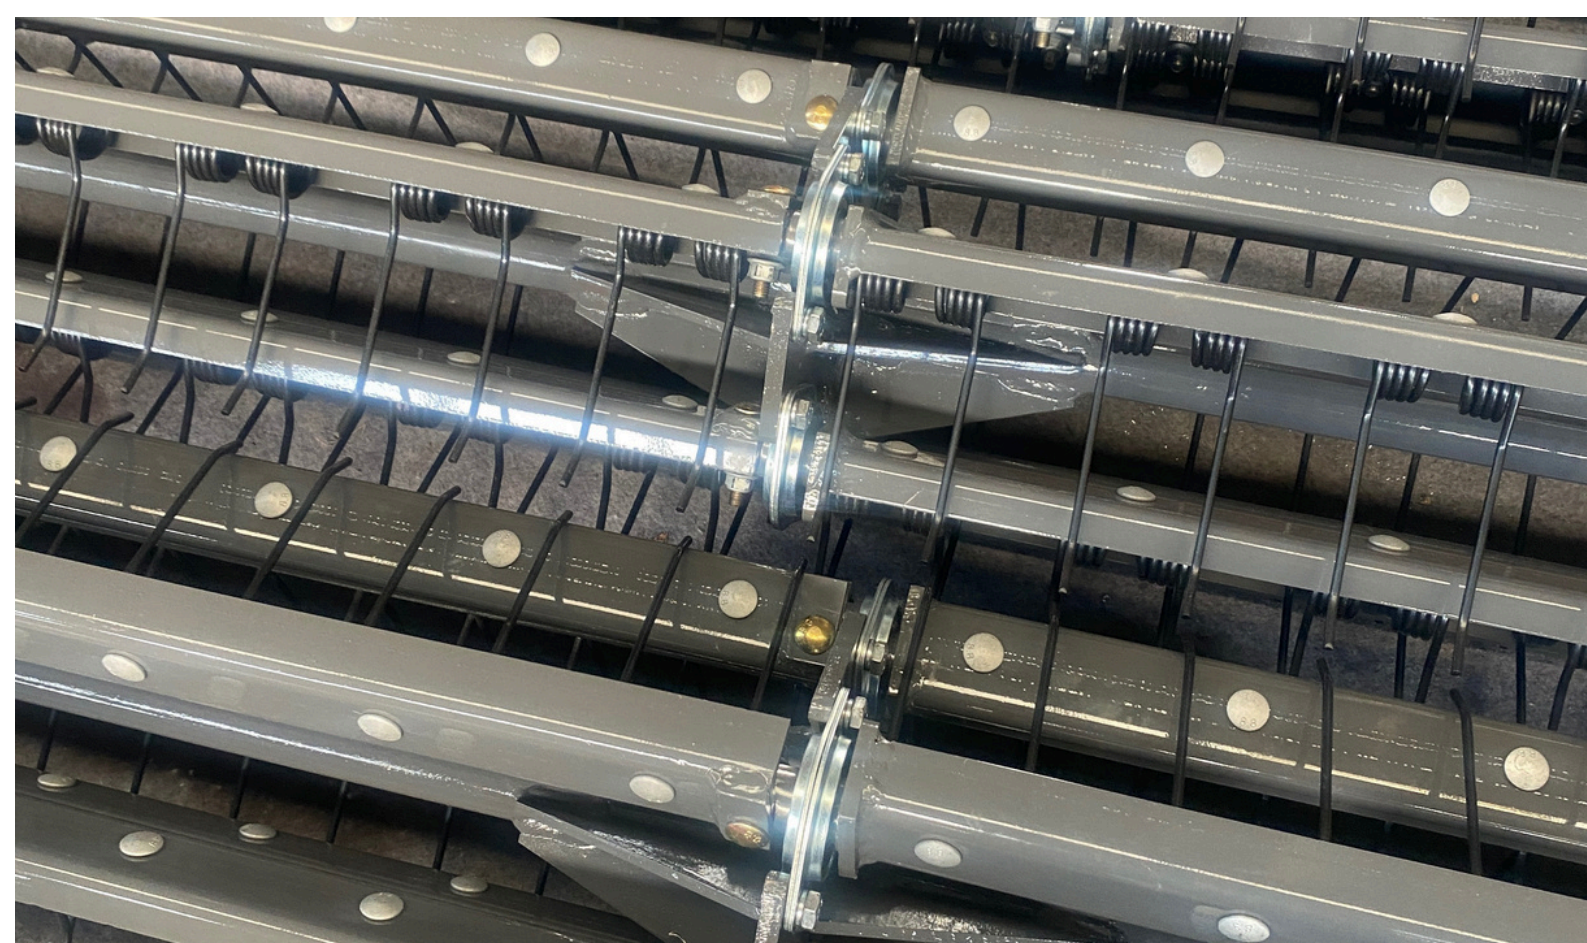

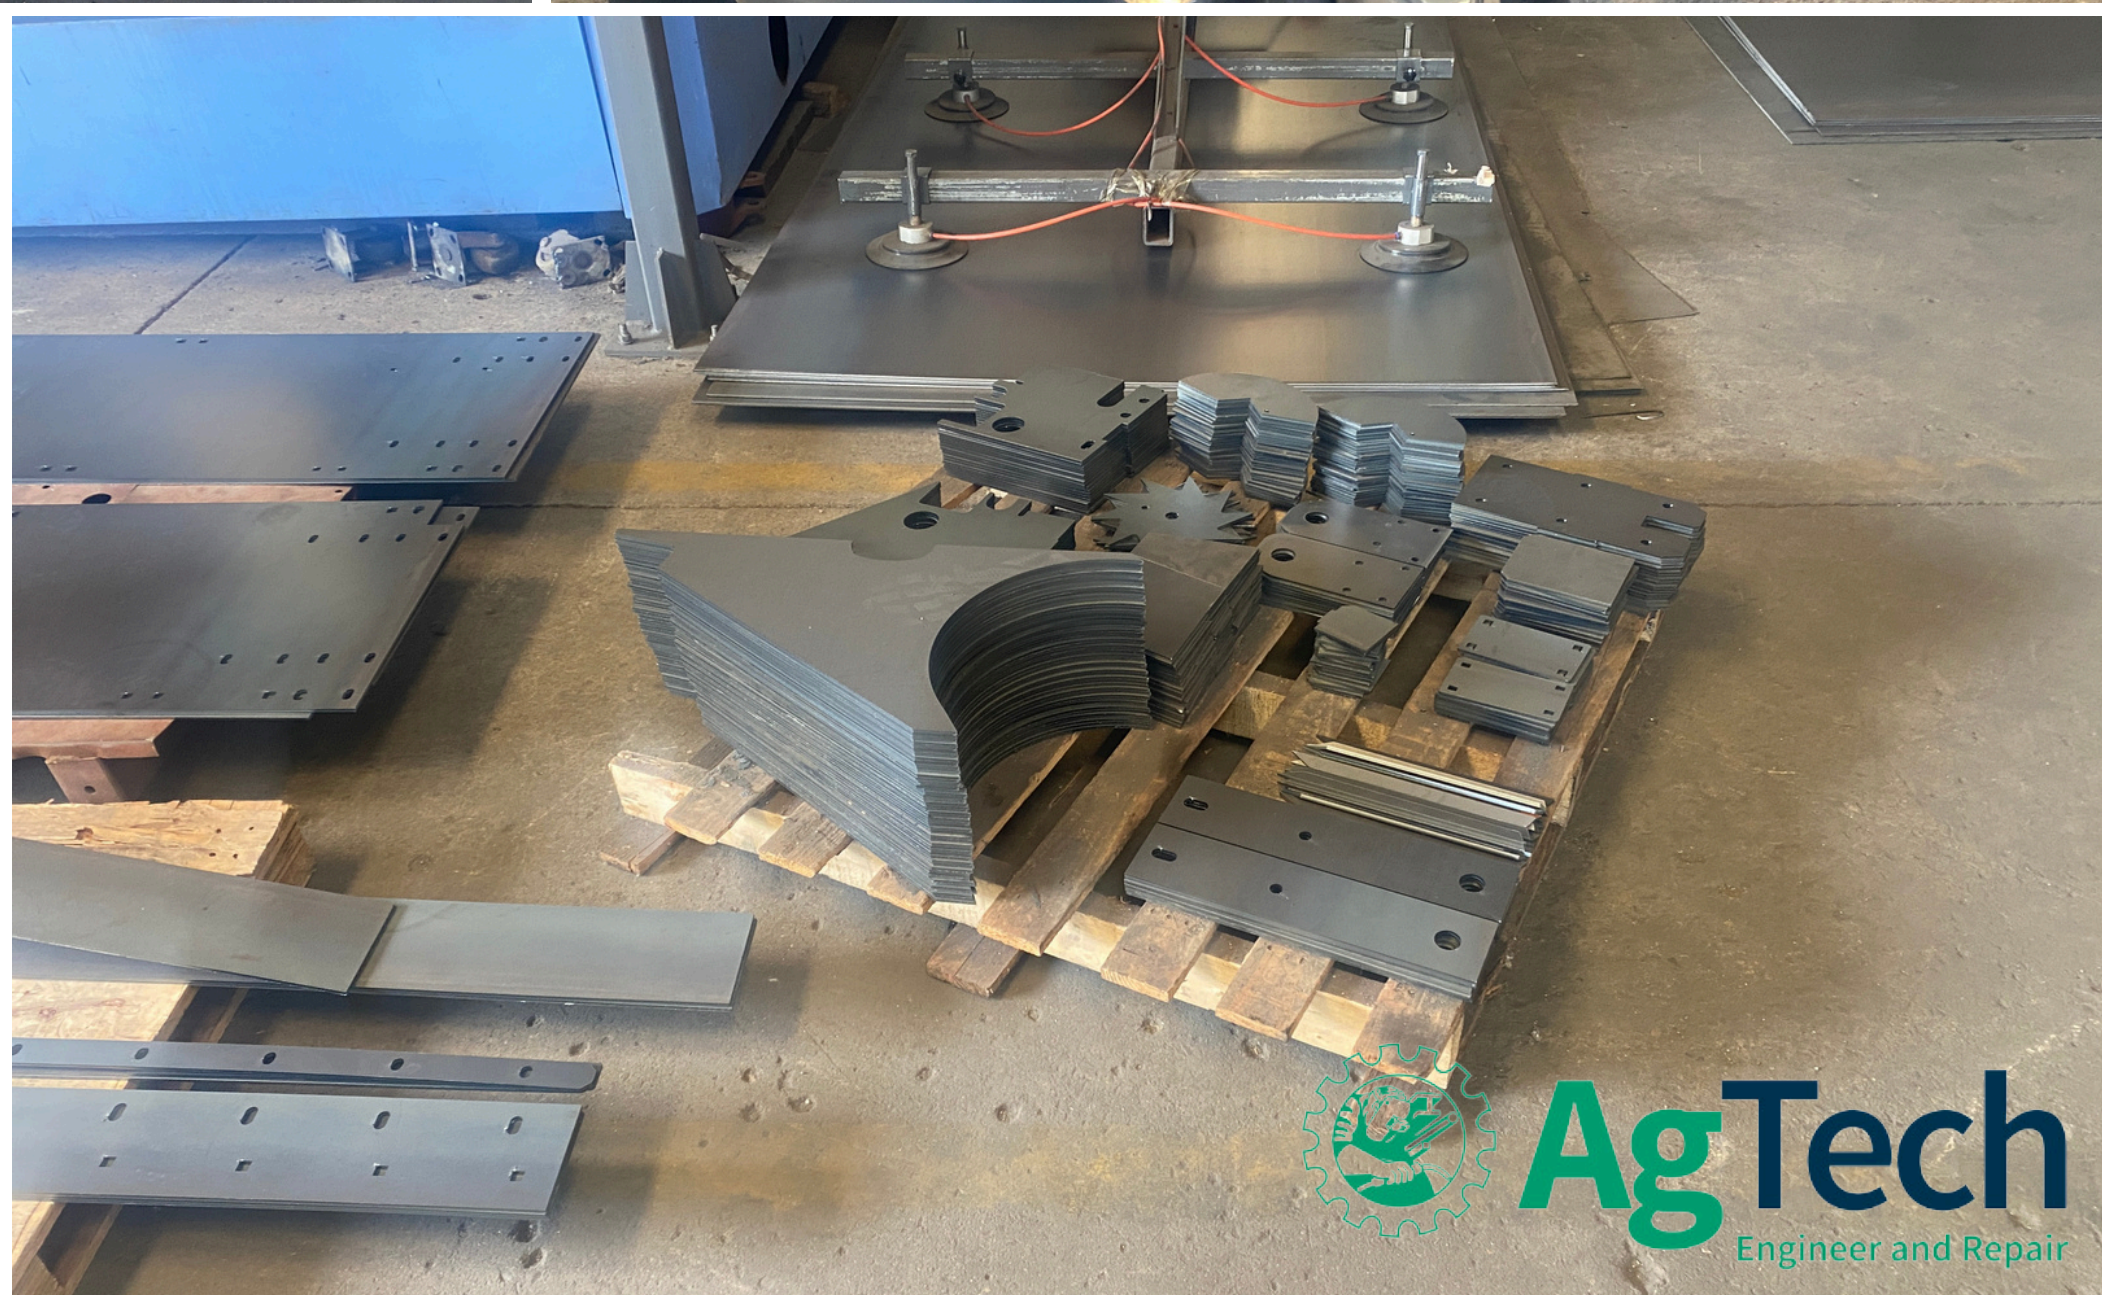



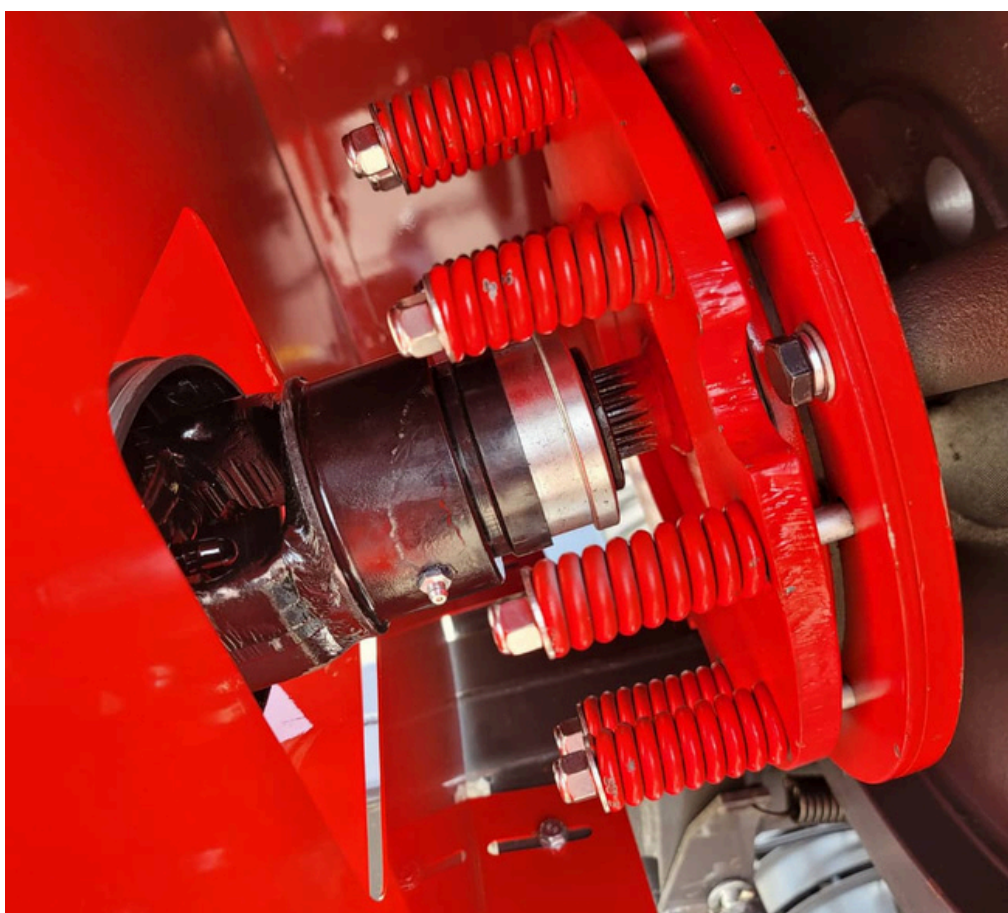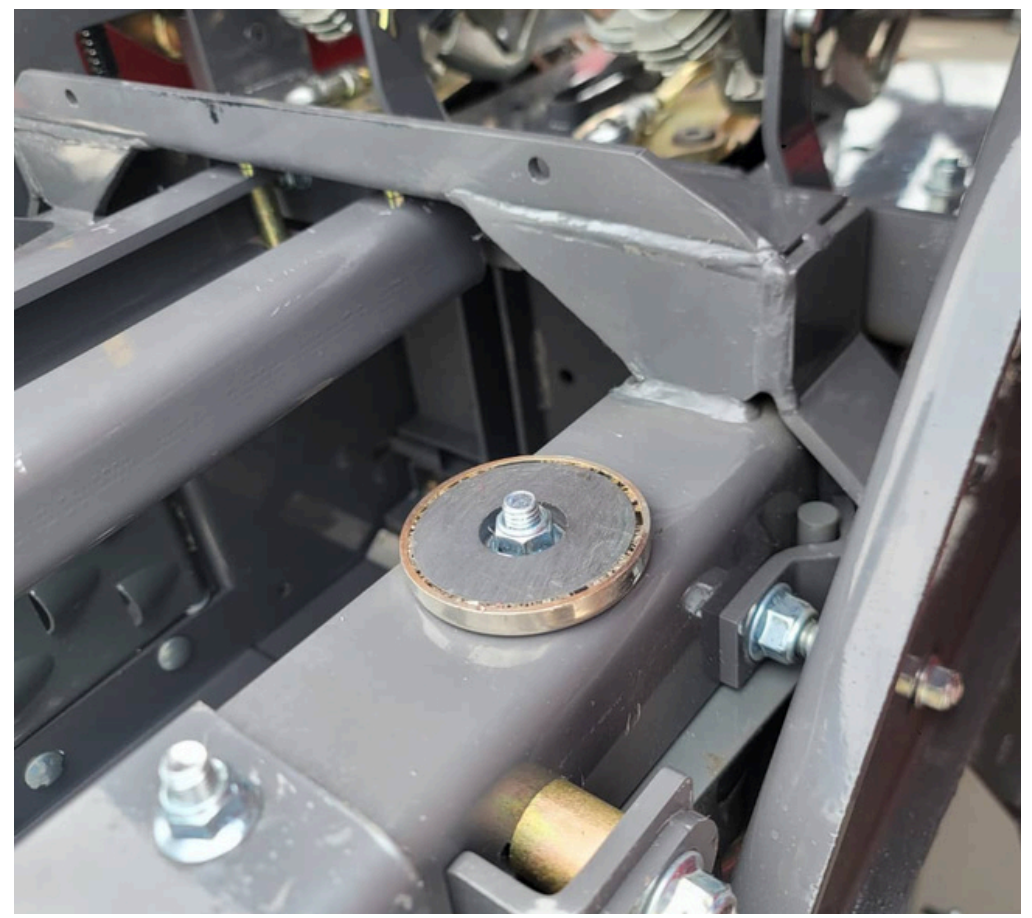

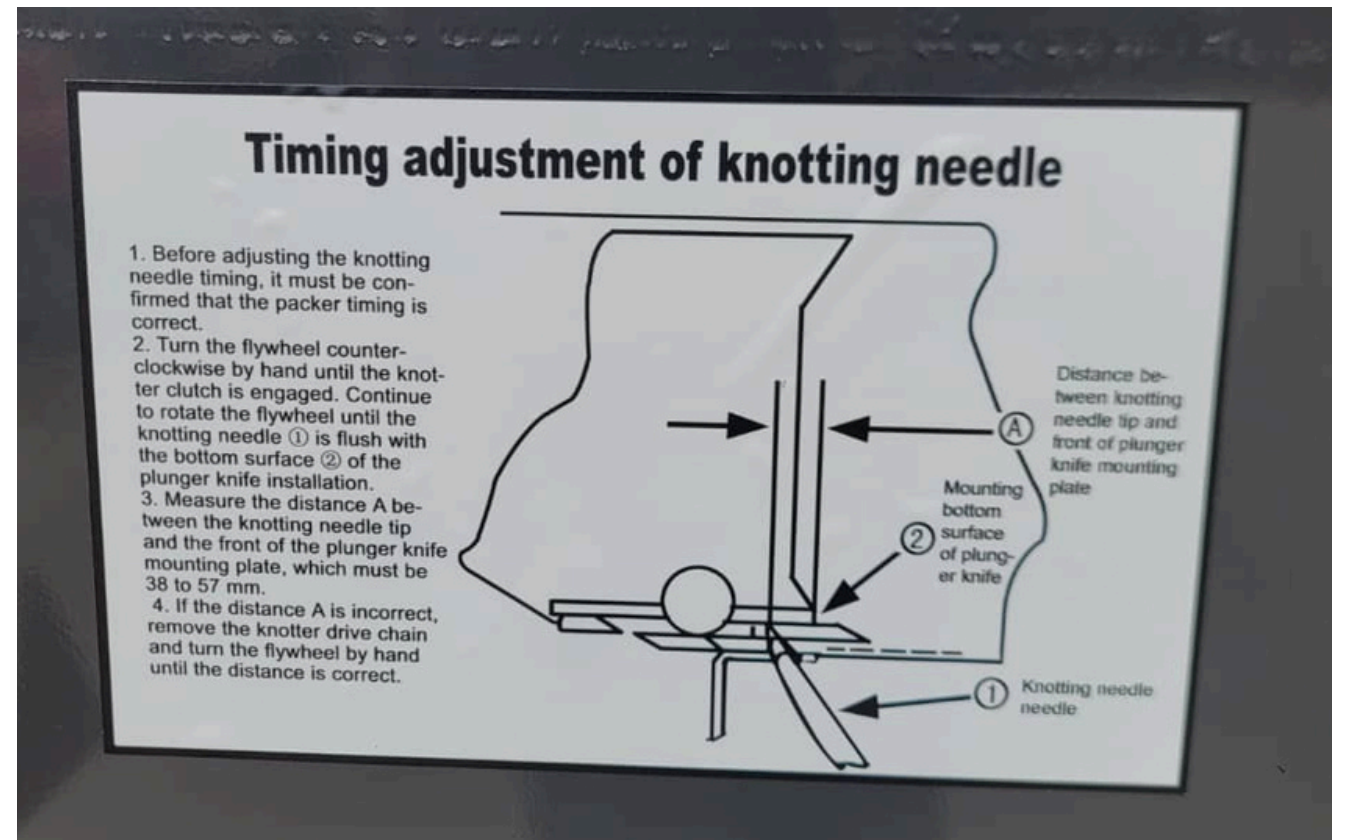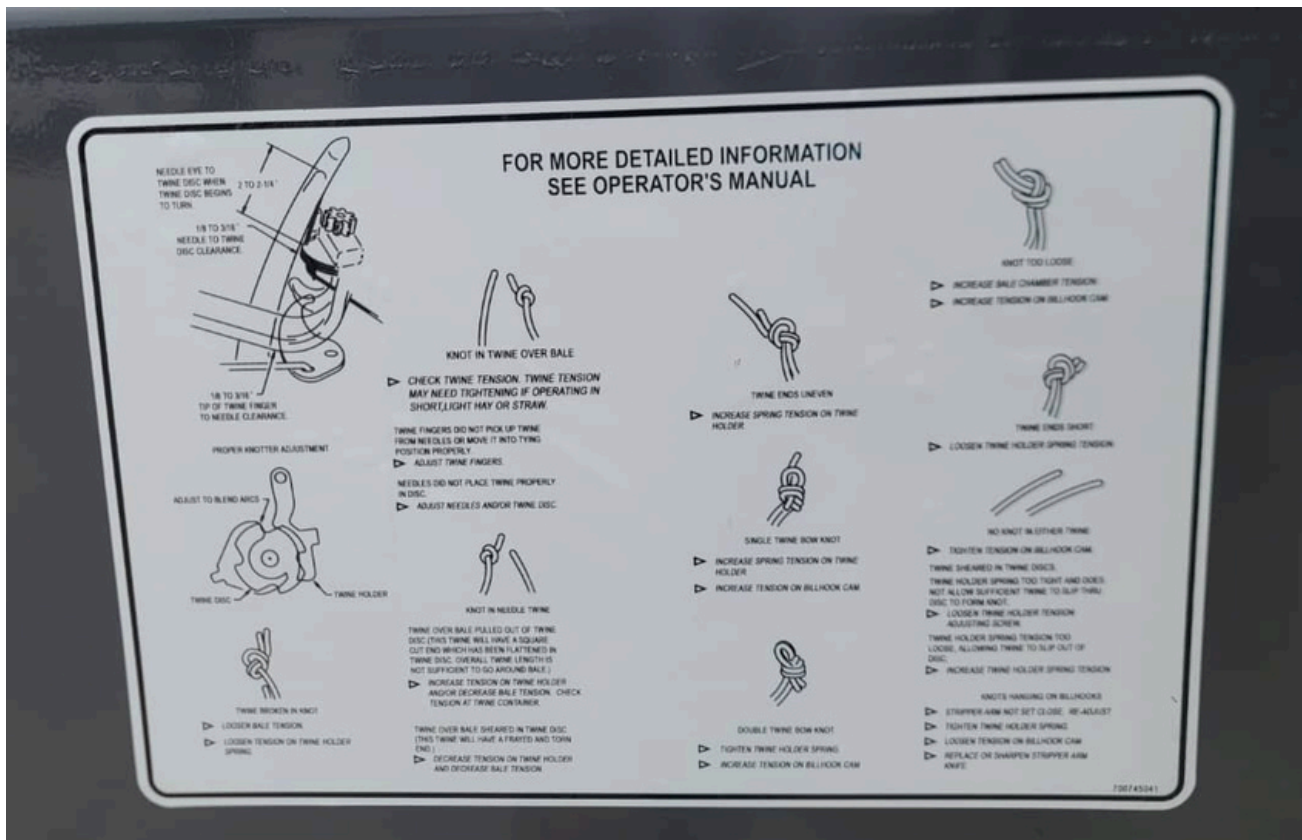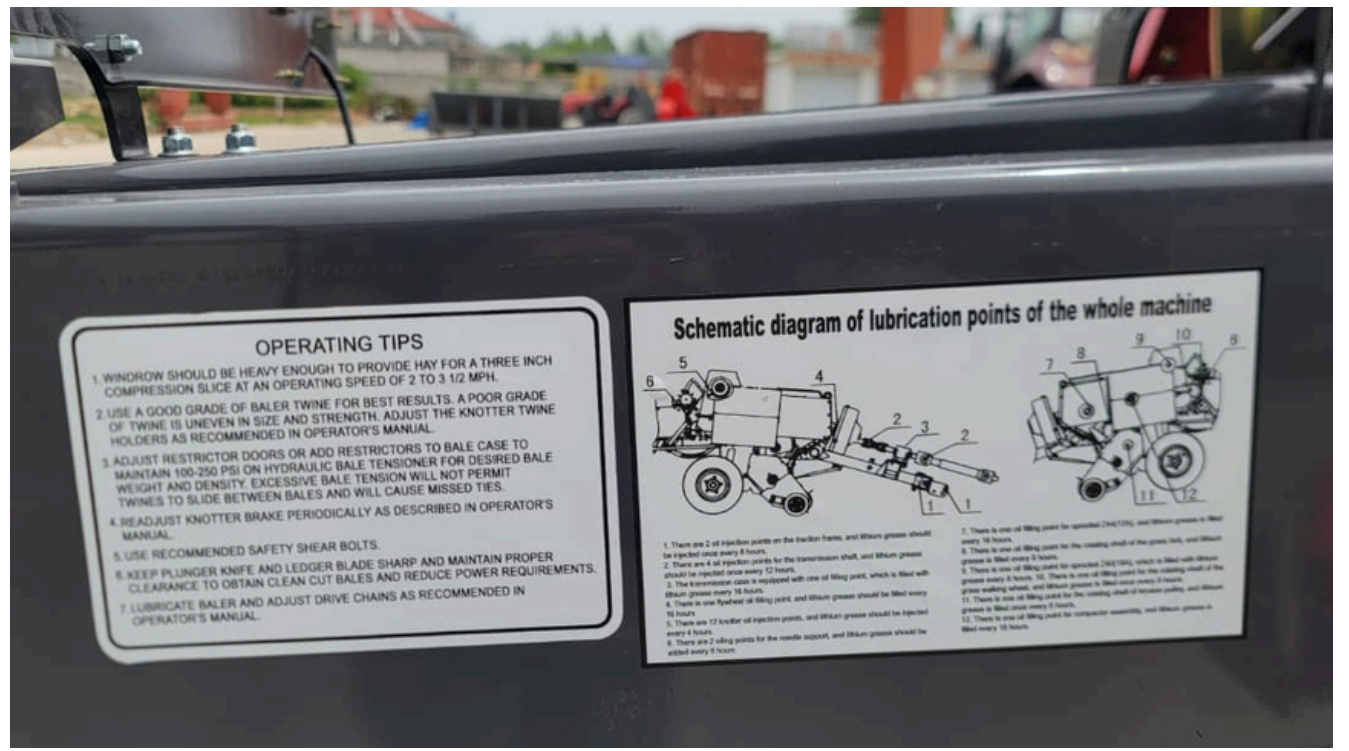



Field test in maize stubble during visit



